



06831-064 Parka Jacket

detachable quilted lining - waterproof - multi-protective
 MASCOT® MULTISAFE



XS	S	M	L	XL	2XL	3XL
4XL						

Main material/upper material

98% polyester/2% carbon fibres
 250 g/m²




- Anti-static, acid-resistant and flame-retardant.
- Breathable, wind and waterproof with taped seams.
- Quilted lining can be zipped out.
- Fastening with two way zip, double storm flap and hidden press studs.
- Possibility to attach MASCOT® MacGill hood with press studs.

Technical info

Fluorescent with vertical and horizontal reflective tape. Two-toned. Anti-static, acid-protective and flame retardant. Breathable, wind and waterproof. Taped seams. Removable padded lining. Fastening with two-way zip, double storm flap and hidden press studs. Chest pockets with flap. Front pockets with flap. Drawstring at waist. Rib (hidden in storm flap) at cuffs. Elastic at cuffs. Hood press studs.


User



Canvas structure. According to EN ISO 20471, this product is certified to retain its properties with 25 domestic washes. Impregnation is required after each wash to maintain EN 13034 protection.

Industrial care category C2

Certifications

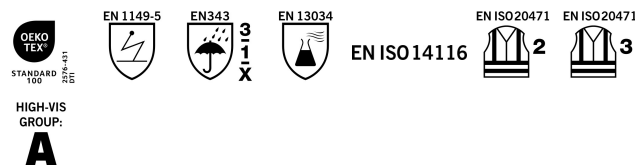

- OEKO-TEX® STANDARD 100
- EN 1149-5 (tested according to EN 1149-3)
- EN 343 3-1-X
- EN 13034 PB (6)
- EN ISO 14116 (outer face index 1/inner face index 3)
- EN ISO 20471 - class 2 (XS-S)
- EN ISO 20471 - class 3
- Hi-Vis Group A

Logo

Due to the unique properties of the fabric, logo printing is only available through the use of specific transfer types. As this is a safety product, we strongly recommend that MASCOT affix the logo to reduce the risk of errors. Please contact customer service for further information.

The product is certified with a maximum logo area of (M-4XL) 0 m², (XS-S) 0,2200m². This approved area must not be exceeded. Logos respectively on the front or back of the product, can only constitute a maximum of 50% of the total approved logo area in order to maintain the EN ISO 20471-certification. Note: The listed area is only a guide to how much space is available for logo placement. In order to maintain the product's hi-vis class according to EN ISO 20471, the instructions on logo size must be observed.

Logo placement:

- Workwear logo. Special placement. Contact to discuss further