



13879-216 Trousers with kneepad pockets

multi-protective

MASCOT® MULTISAFE



82C44	82C45	82C46	82C47	82C48	82C49	82C50
82C51	82C52	82C54	82C56	82C58	82C60	82C62
82C64	82C66	82C68	90C46	90C47	90C48	90C49
90C50	90C51	90C52	90C54	90C56	90C58	90C60
90C62	76C46	76C48	76C50	76C52	76C54	76C56



- Anti-static, acid-resistant and flame-retardant.
- Double and triple stitched seams on leg and crotch.
- Waist band formed following the body's anatomy so that it supports in all working positions.
- Ergonomically shaped trouser legs are constructed to follow the body's natural movements.
- Adjustable kneepad pockets with flap and top access, so dirt doesn't collect.

Technical info

Two-toned. Fluorescent with reflective tape. Anti-static, acid-protective and flame retardant. Dirt resistant. Protects from electric arcs and occasional welding arcs. Double and triple stitched seams on the leg and crotch. Belt loops. Low waist and form cut waist band. D-ring. Fly with zip. Ergonomically formed trouser leg. Front pockets. Back pockets with reinforcement, flap and hidden press studs. Thigh pocket with flap and hidden press studs. Phone thigh pocket. Reinforced ruler pocket with flap. Adjustable knee pad pockets with flap and top access. Co-certified together with kneepad type large in accordance with EN 14404-3.

User



Main material/upper material

55% modacrylic/39% cotton/5% polyamid/1% carbon fibres


275 g/m²



Twill/Ripstop. Shrinkage max. 3%. According to EN ISO 20471, this product is certified to retain its properties with 50 domestic washes or 50 industrial washes. Impregnation is required after each wash to maintain EN 13034 protection.

Industrial care category B1

Certifications

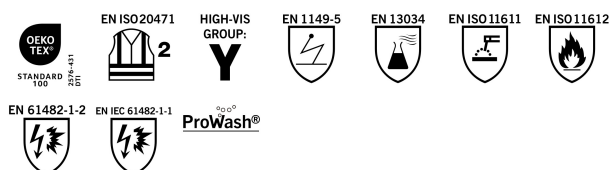

- OEKO-TEX® STANDARD 100
- EN ISO 20471 - class 2
- Hi-Vis Group Y
- EN 1149-5 (tested according to EN 1149-3)
- EN 13034 (Type 6)
- EN ISO 11611 - class 1 (A1 + A2)
- EN ISO 11612 (A1, A2, B1, C1, E1, F1)
- EN 61482-1-2 APC 1
- EN IEC 61482-1-1 (EBT 7,7 cal/cm², ELIM 7,3 cal/cm²)
- ProWash®

Logo

Due to the unique properties of the fabric, logo printing is only available through the use of specific transfer types. As this is a safety product, we strongly recommend that MASCOT affix the logo to reduce the risk of errors. Please contact customer service for further information.

The product is certified with a maximum logo area of 0,1600m². This approved area must not be exceeded. Logos respectively on the front or back of the product, can only constitute a maximum of 50% of the total approved logo area in order to maintain the EN ISO 20471-certification. Note: The listed area is only a guide to how much space is available for logo placement. In order to maintain the product's hi-vis class according to EN ISO 20471, the instructions on logo size must be observed.

Logo placement:

- Workwear logo. Special placement. Contact to discuss further